verzion (1.0.0)
24.12.2019



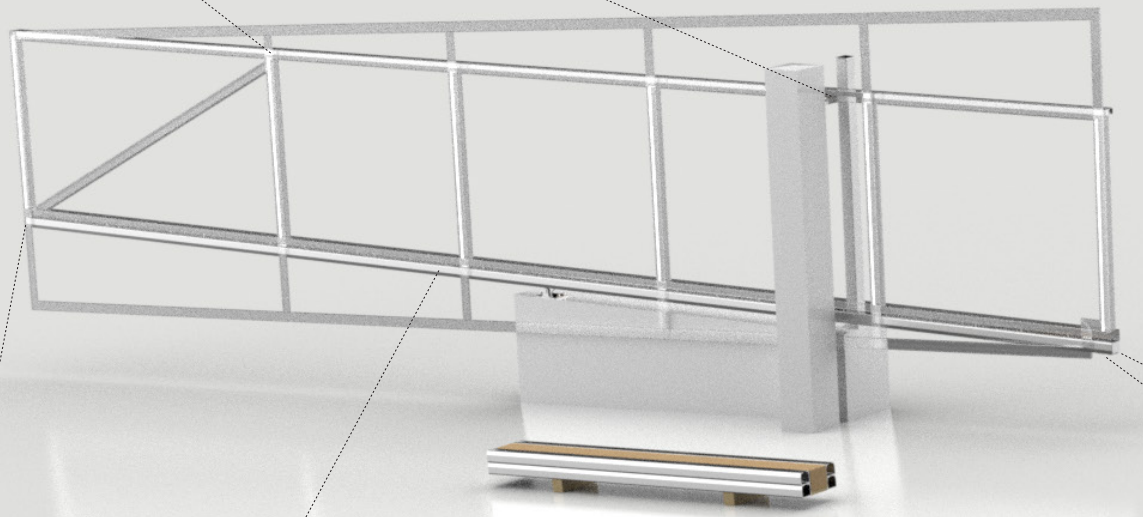



NEW

CAIS CROSSTRACK M 6.0+8.0

CANTILEVER HARDWARE

E-BOX “M”

CROSSTRACK “M” 6.0

SET

SPEED MEK ..... 2 pcs
STAGE MZ 2,85 ..... 3 pcs
DRIVER 48/2,8 ..... 3 pcs
RUN M ..... 1 pc
LAST M ..... 1 pc
PILOT MN ..... 2 pcs
JRM 40 ..... 1 pc
PARK CSM ..... 1 pc
BOLT M10x25 ..... 24 pcs
RIVET NUT ..... 24 pcs

ART. SET / kg
E-BOX “M” 6.0 .....153 kg

GATES UP TO
LENGHT ..... 6 m

CODE: 1710080

CROSSTRACK “M” 8.0

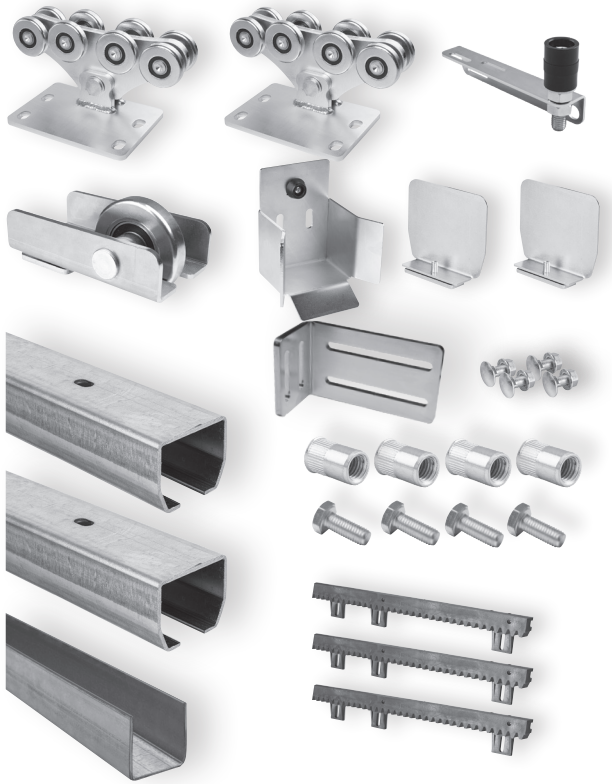

SET

SPEED MEK ..... 2 pcs
STAGE MZ 2,85 ..... 4 pcs
DRIVER 48/2,8 ..... 4 pcs
RUN M ..... 1 pc
LAST M ..... 1 pc
PILOT MN ..... 2 pcs
JRM 40 ..... 1 pc
PARK CSM ..... 1 pc
BOLT M10x25 ..... 32 pcs
RIVET NUT ..... 32 pcs

ART. SET / kg
E-BOX “M” 8.0 .....193 kg

GATES UP TO
LENGHT ..... 8 m

CODE: 1710081

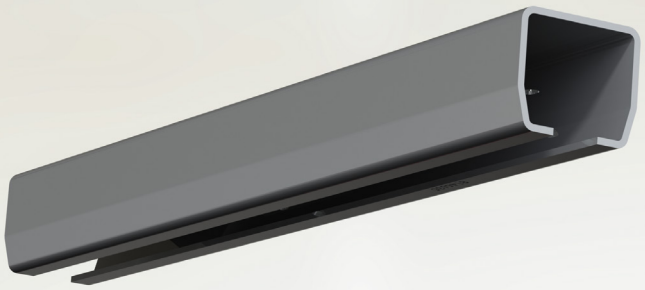

D

Wuppermann
GERMAN STEEL

270 g/m²
HOT DIPPED GALVANIZED

GALVANIZED INTERNAL EDGES

SPECIAL THICKNESS
5,00 mm

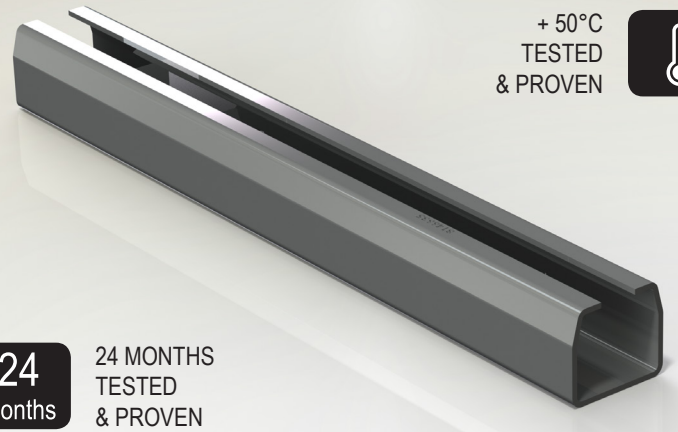

- 37°C TESTED & PROVEN

+ 50°C TESTED & PROVEN

24 months
24 MONTHS TESTED & PROVEN

CZ
MADE IN CZECH REPUBLIC

15 BOLTS
15 RIVET NUTS
INCLUDED (*)

SLOTTED HOLE PUNCHED EVERY 400mm IN TRACK

SERIAL NUMBER CARRIAGE TESTED & PROVEN

EASY ASSEMBLY

FAST NO WELDING REQUIRED

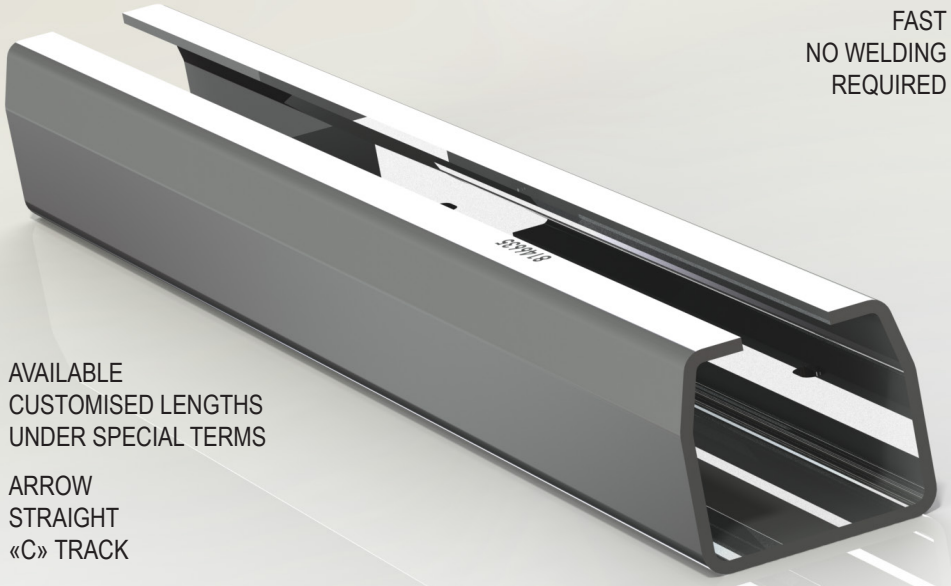

AVAILABLE CUSTOMISED LENGTHS UNDER SPECIAL TERMS

ARROW STRAIGHT «C» TRACK

18
EIGHTEEN ROLL FORMERS
THE LARGEST NUMBER IN THE INDUSTRY
REMOVE THE INSET «MEMORY» OF THE STEEL

SLOW ROLLING
NO HEAT GENERATED DURING PRODUCTION
KEEPING THE MATERIAL WHERE IT IS ROLLED

R&D

BRNO UNIVERSITY OF TECHNOLOGY

(*) ONLY SETS

CANTILEVER MEK									
	mm; kg	mm; kg	mm; kg	mm; kg	mm; kg	mm; kg	mm; kg	mm; kg	mm; kg
A	4000	4500	5000	5500	6000	6500	7000	7500	8000
max. weight gate	500 kg	525 kg	550 kg	575 kg	600 kg	625 kg	650 kg	675 kg	700 kg
B	1200	1350	1500	1650	1800	1950	2100	2250	2400
C	1860	2010	2160	2310	2460	2610	2760	2910	3060
D	330	330	330	330	330	330	330	330	330

- SUITABLE FOR INCLINED SURFACE INSTALLATION
- EASY ASSEMBLING
- FAST NO WELDING
- 15 BOLTS 15 RIVET NUTS INCLUDED (*)
- «C» TRACK SERIAL NO. 100% COMPATIBILITY CARRIAGE TESTED
- GERMAN STEEL WUPPERMANN
- HOT DIPPED GALVANIZED
- ARROW STRAIGHT «C» TRACK
- BUILD IN FLYING HOLE PUNCH – EVERY 400 mm
- GALVANIZED INTERNAL EDGES
- ASYMMETRIC EIGHT WHEELED CARRIAGE
- C 2 HQ BEARINGS
- CARRIAGES CENTER HOLES MILLED NOT LASERED
- MULTI RIVITED SECTIONS
- JAPANESE ROBOTICS FANUC
- UNIVERSITY OF TECHNOLOGY – BRNO
- - 37°C TESTED & PROVEN
- + 50°C TESTED & PROVEN
- MADE IN CZECH REPUBLIC
- NO WELDING NEEDED

(*) ONLY SETS

$$B = 0{,}3 \times A$$
$$L = A + B + (2 \times D) + E$$

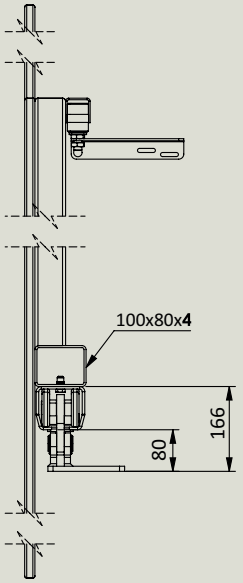

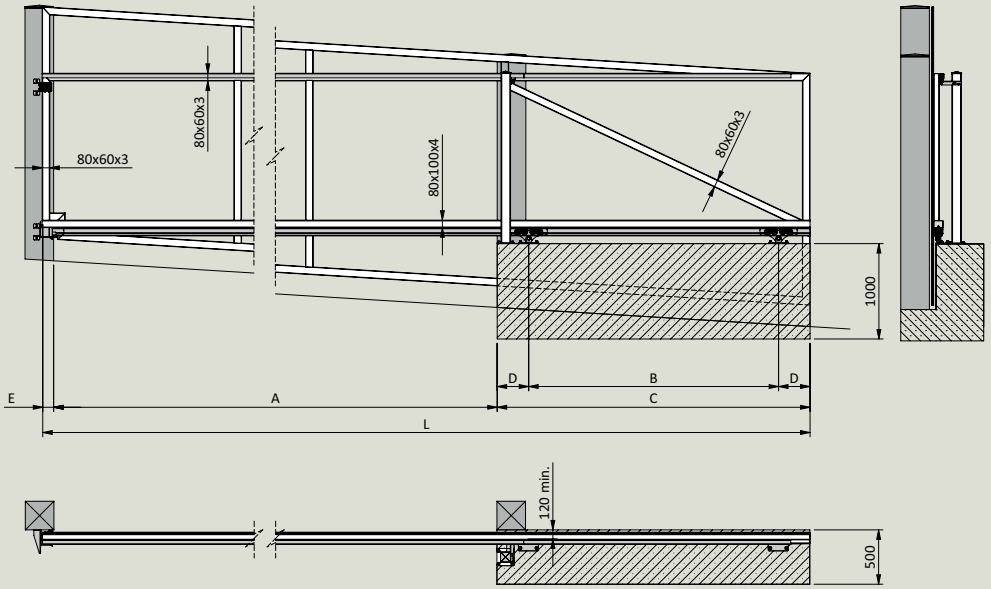

CAIS MANUAL

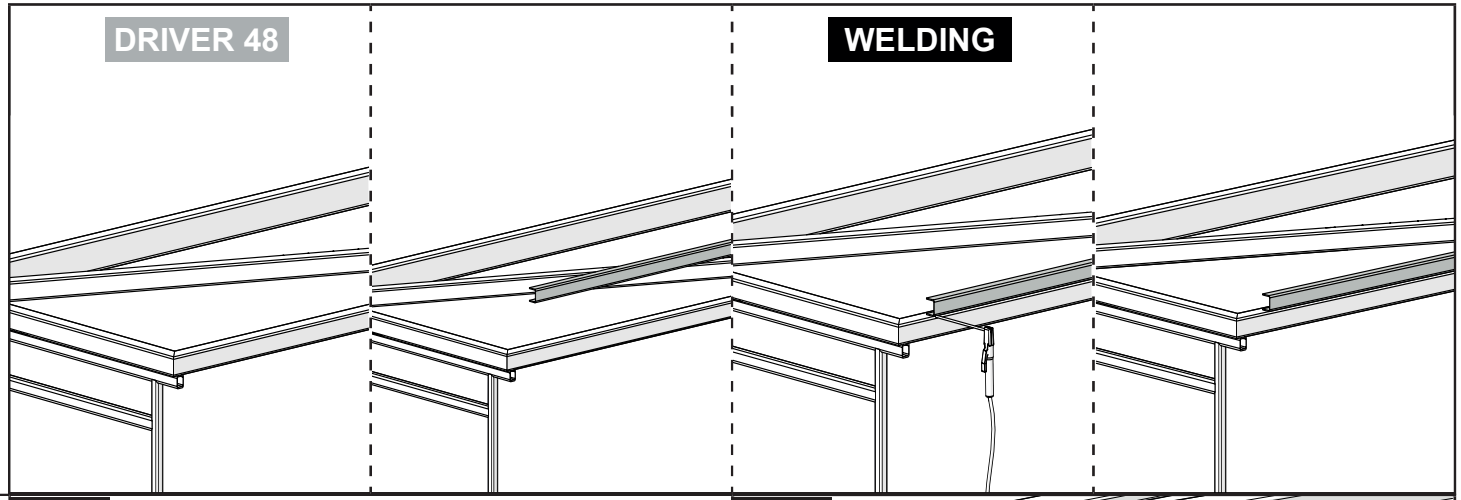

1

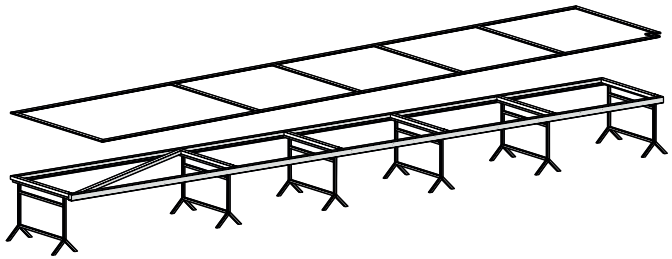

2

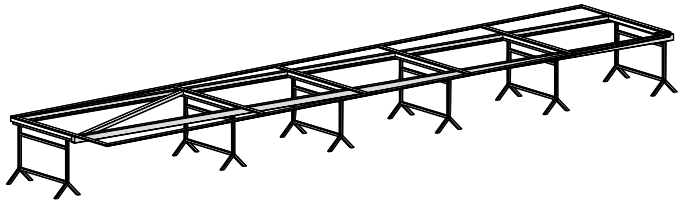

3

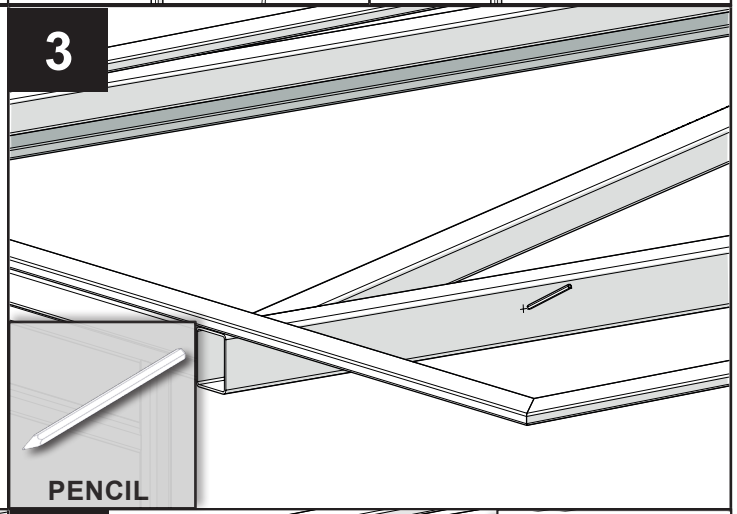

4

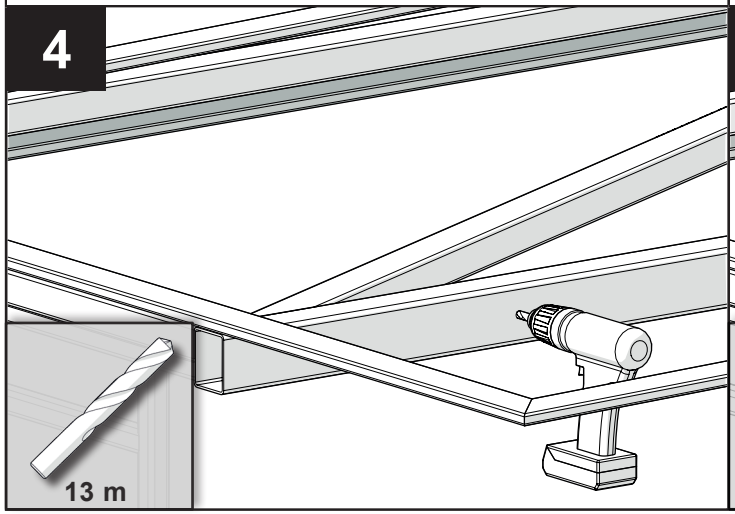

5

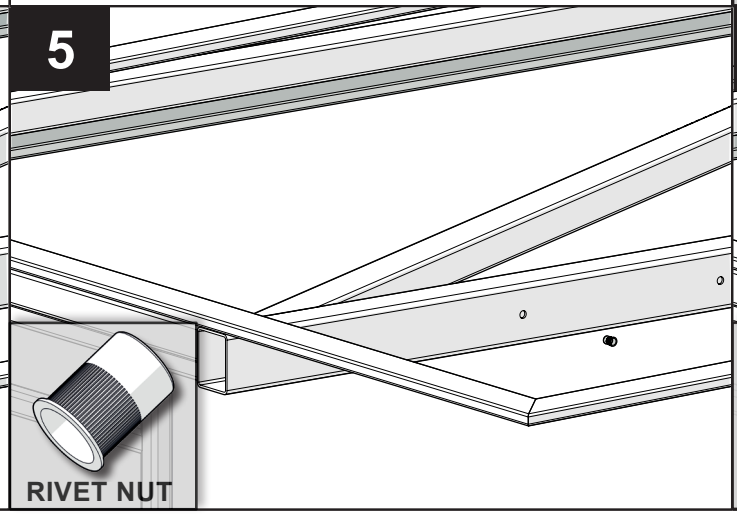

6

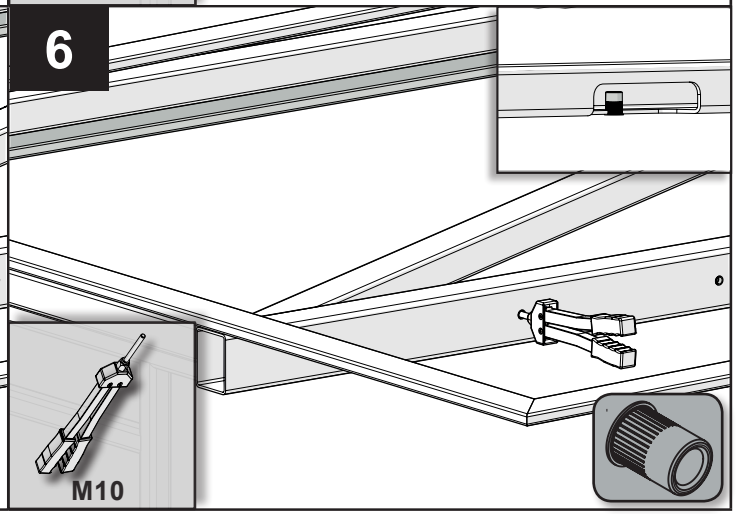

STAGE S

7

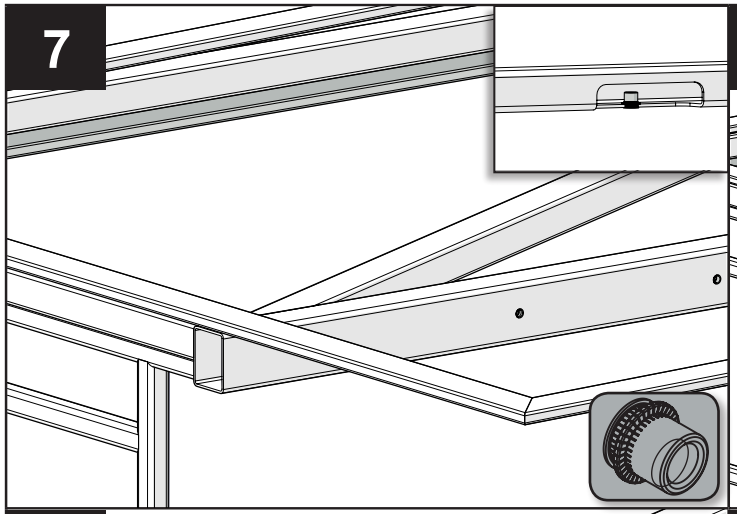

8

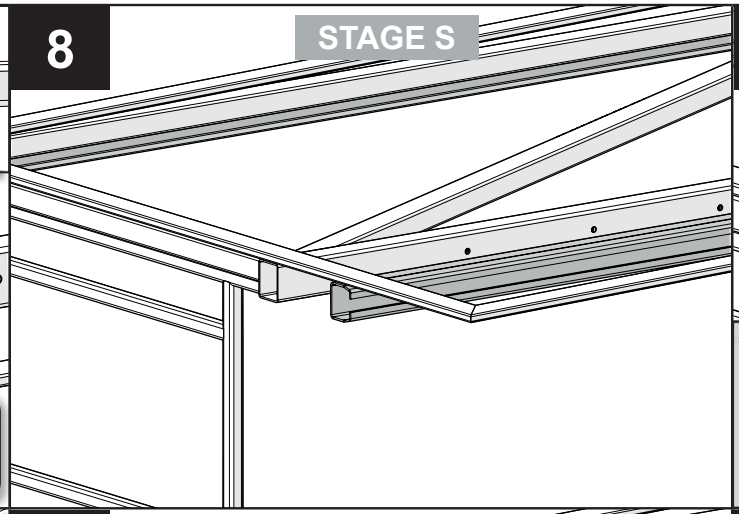

9

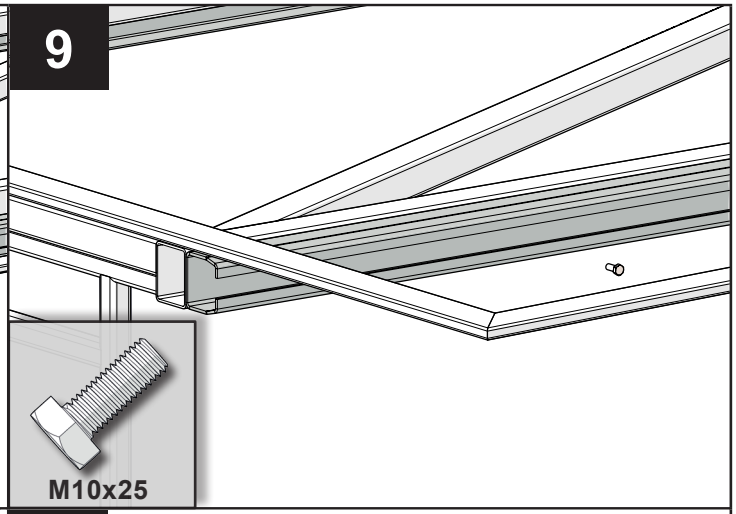

10

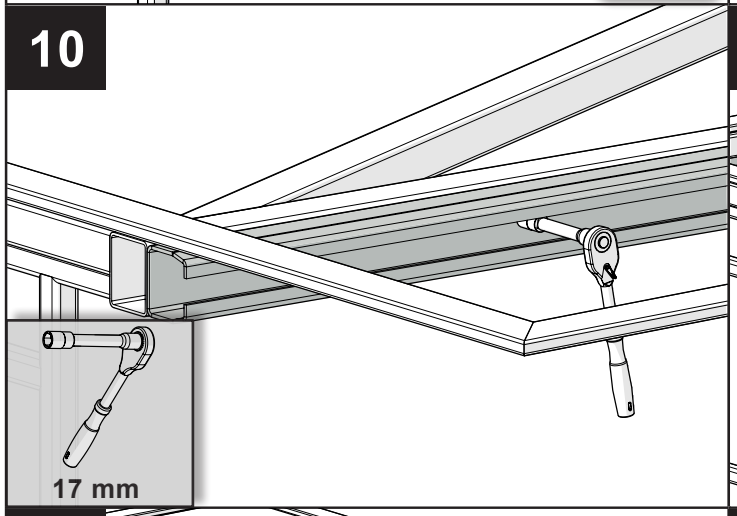

11

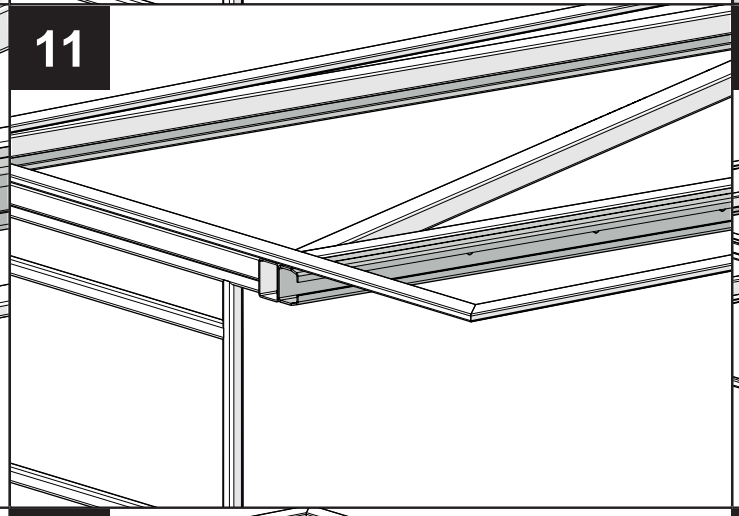

12

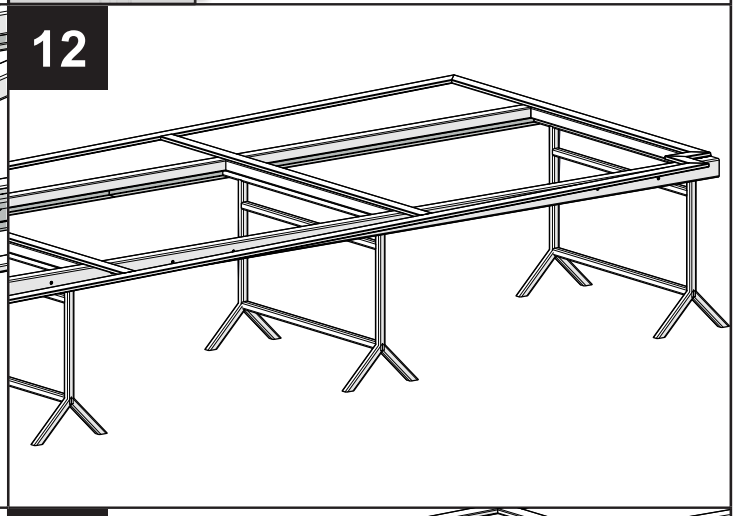

13

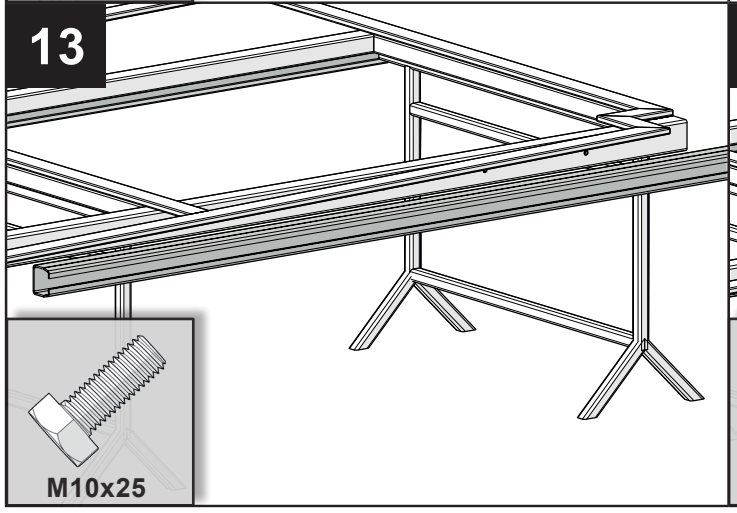

14

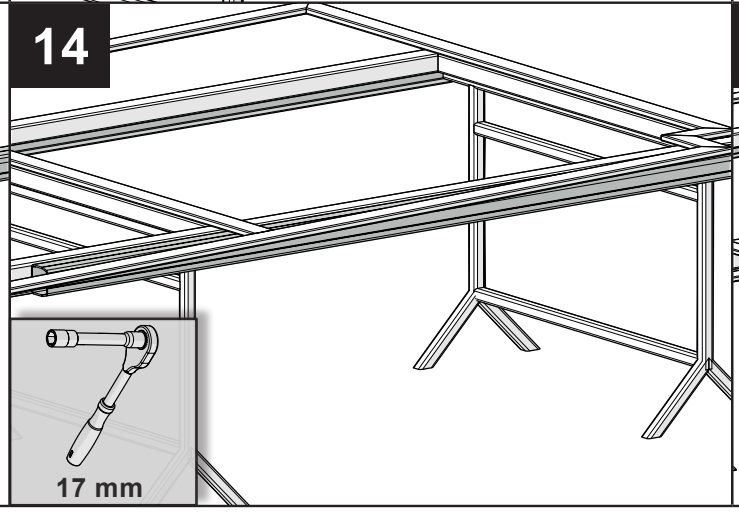

15

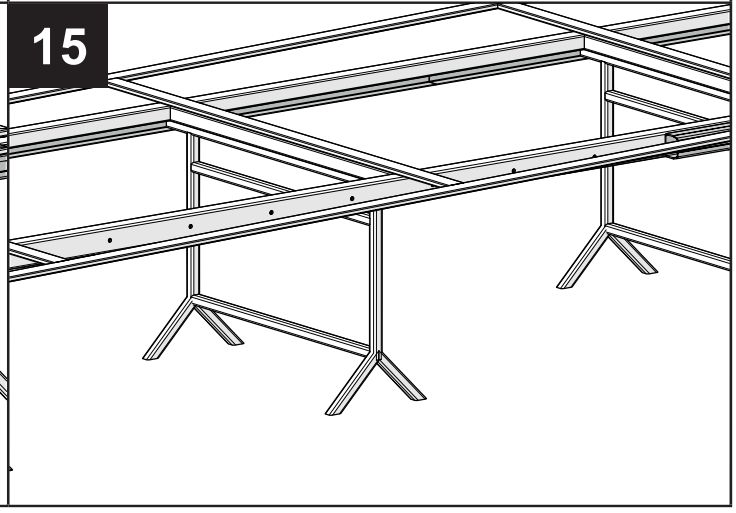

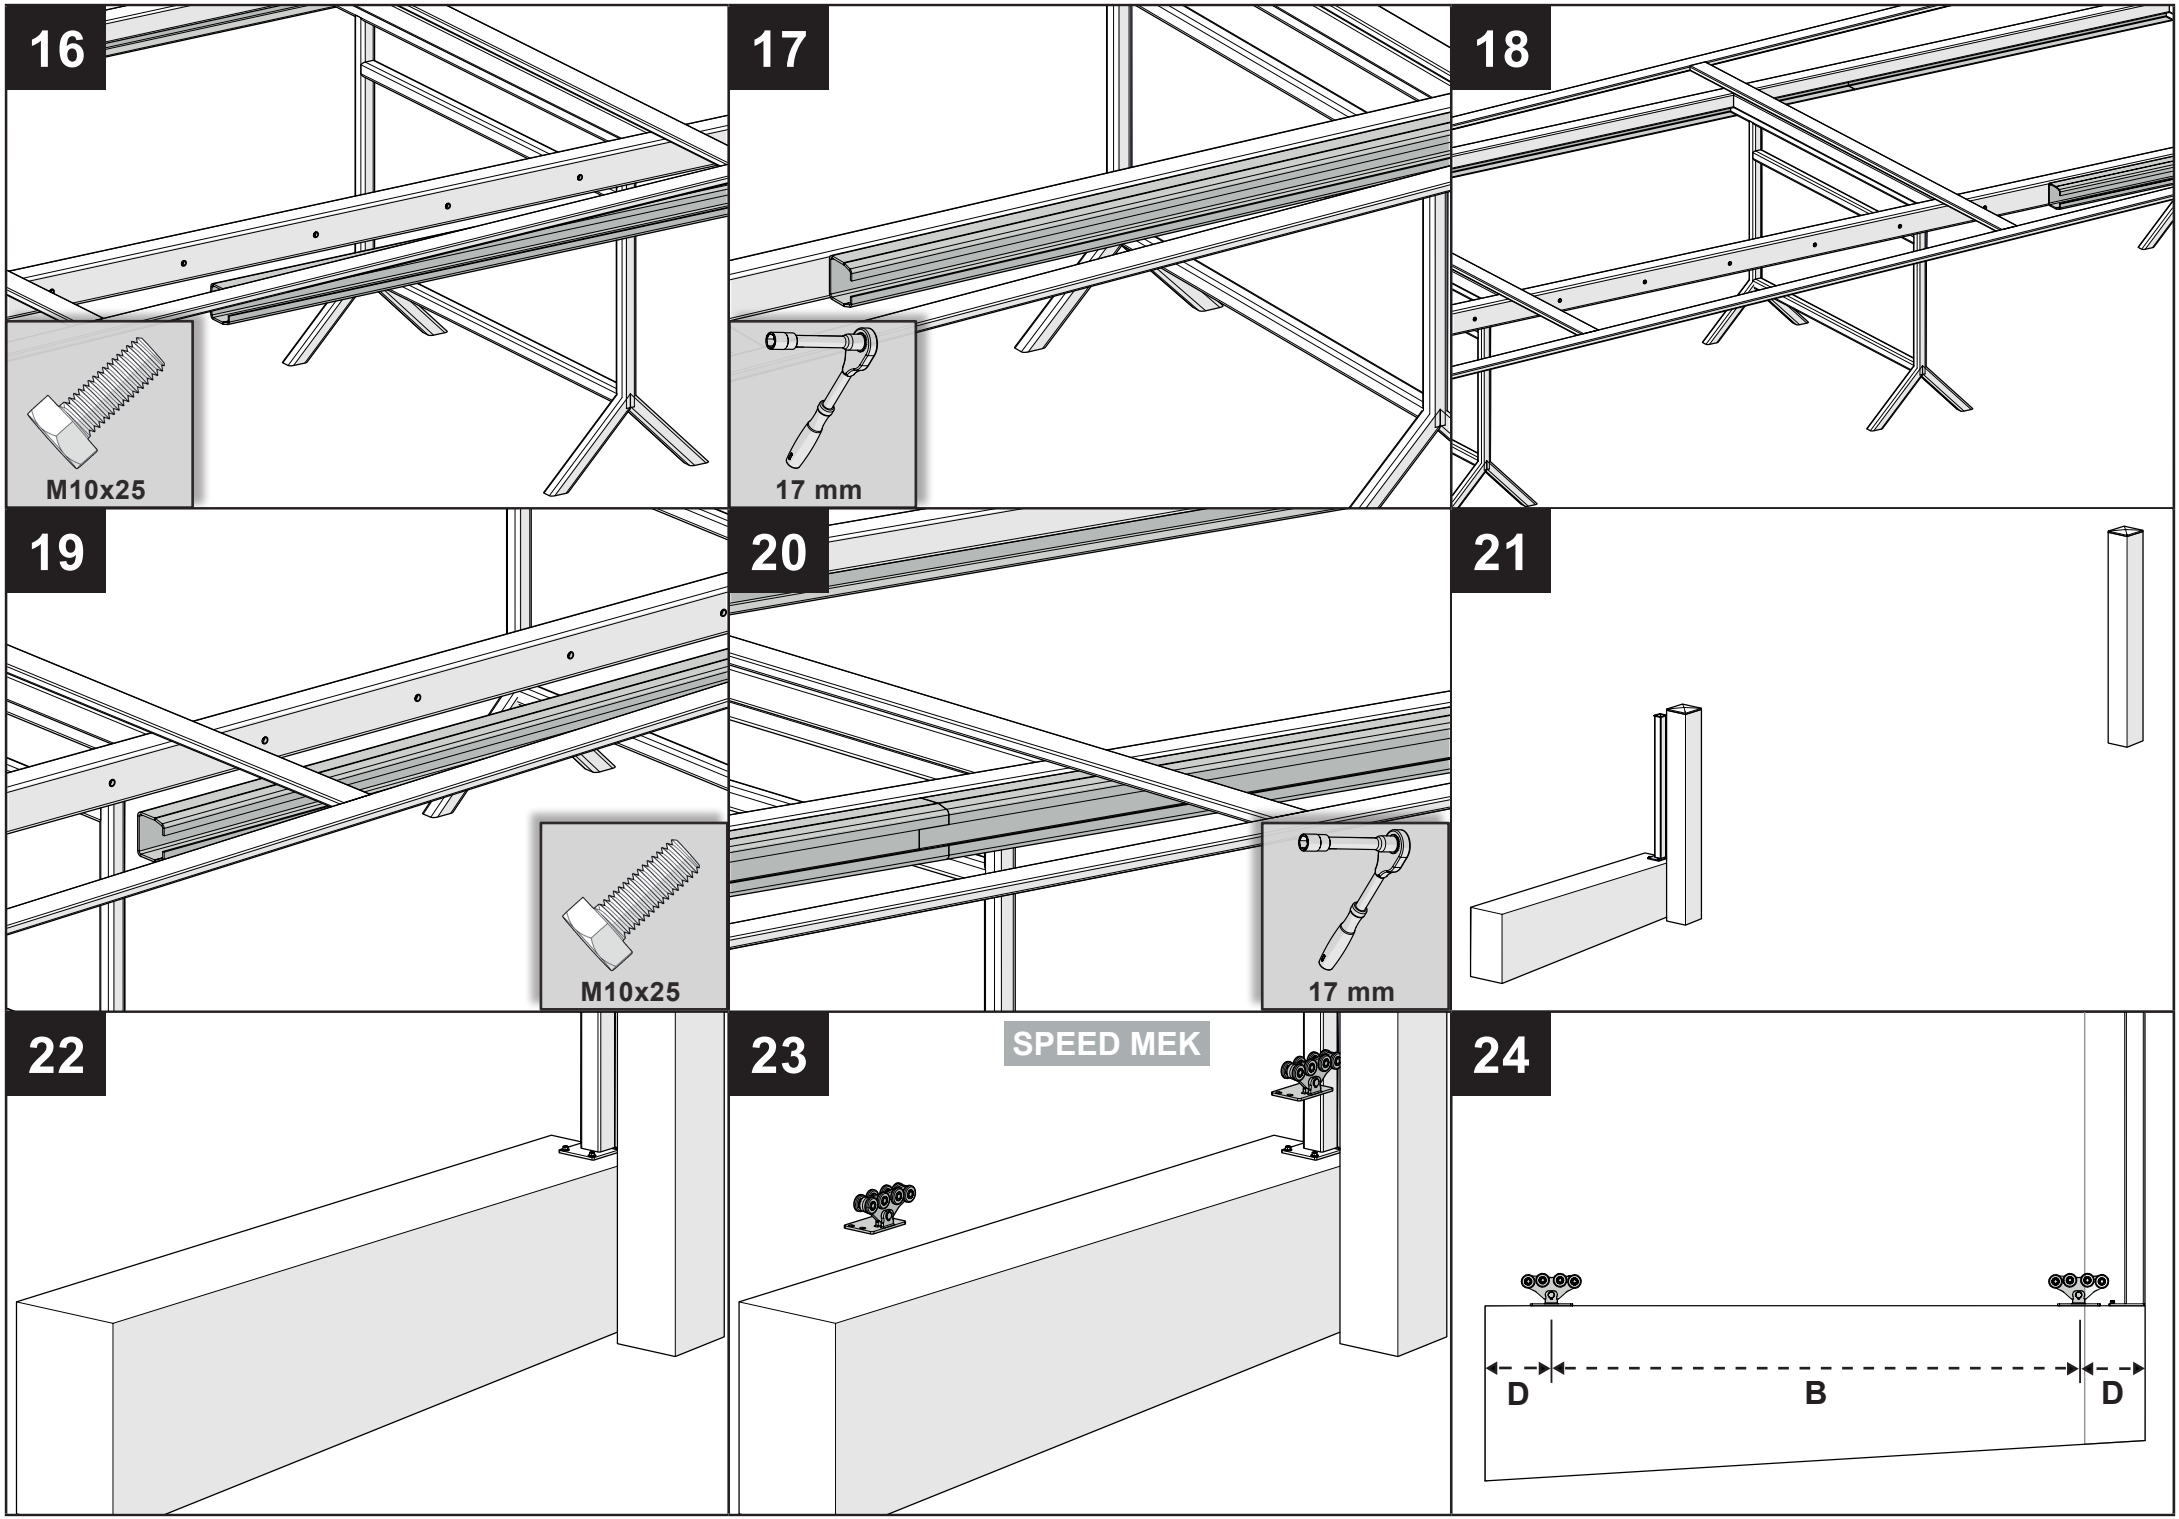
16
M10x25
17
17 mm
18
19
M10x25
20
17 mm
21
22
23
SPEED MEK
24
D
B
D

25



26

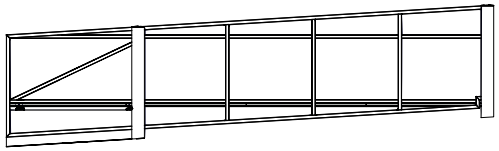

27

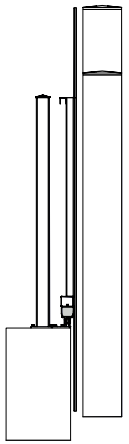

28

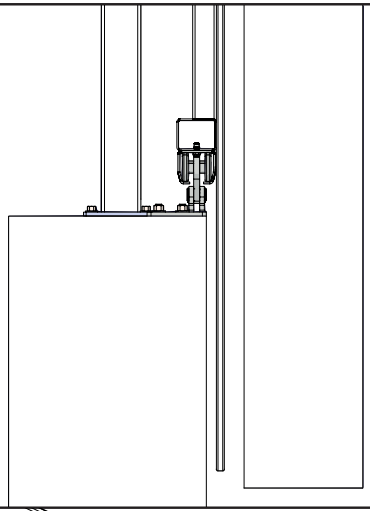

29

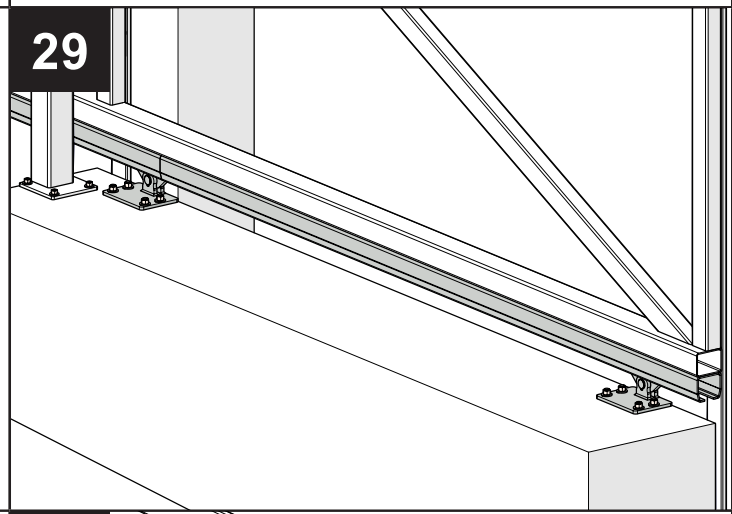

30

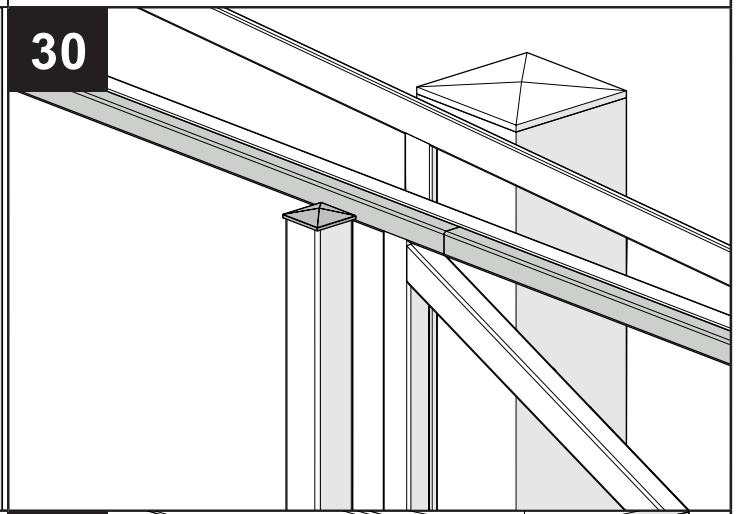

31

JRM 40



32

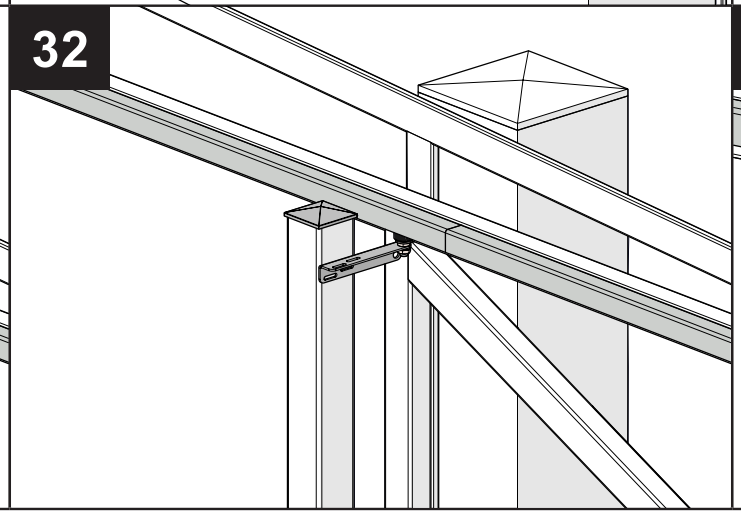

33

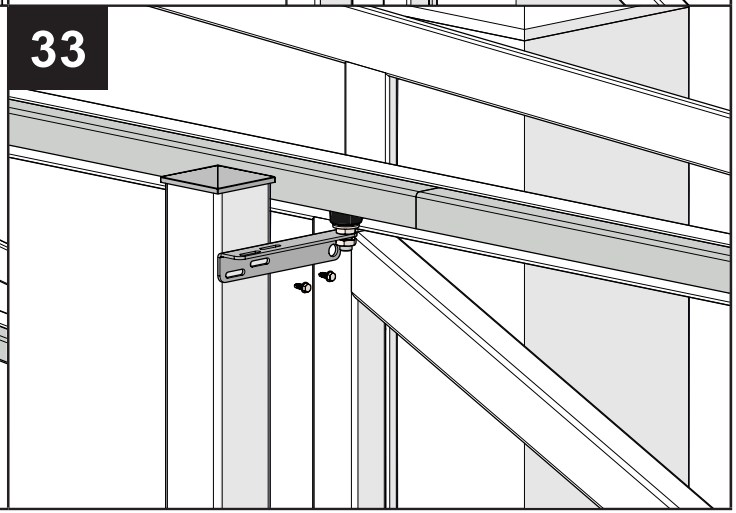

34

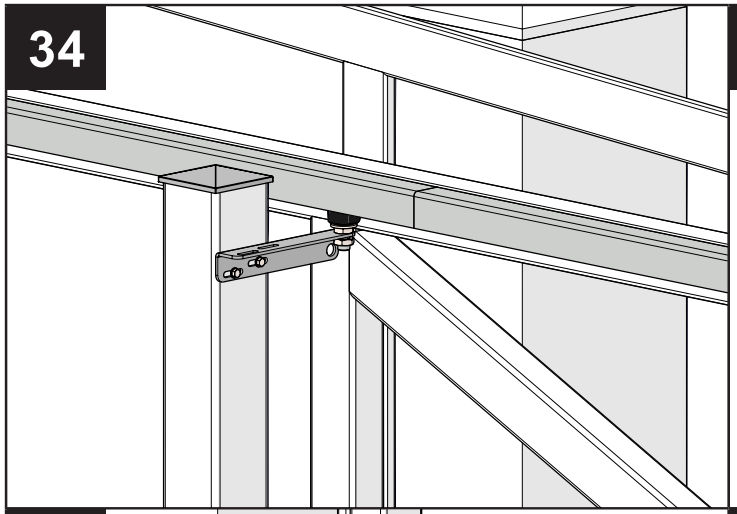

35

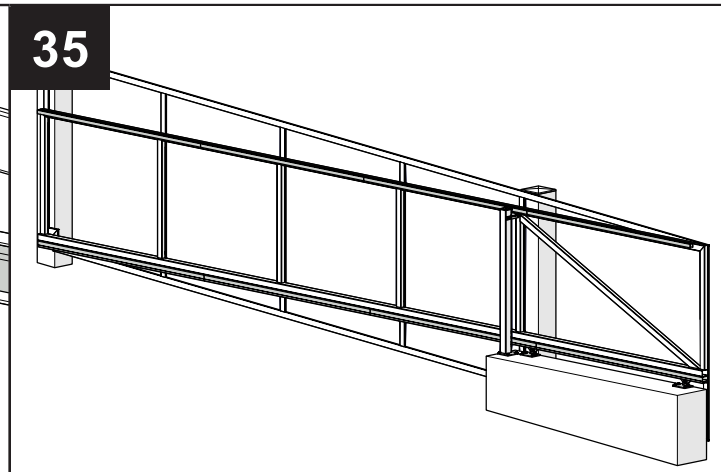

36

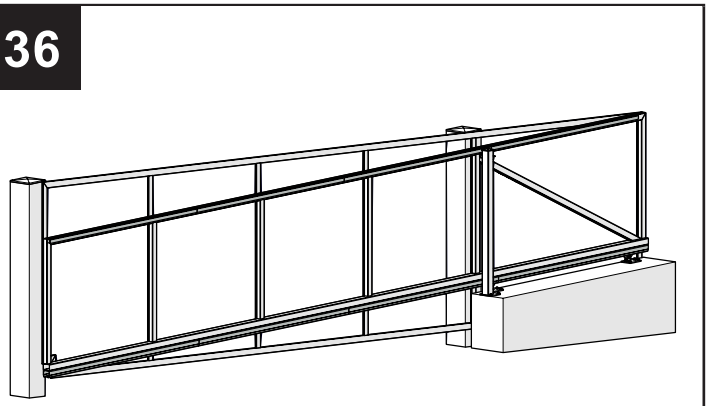

37

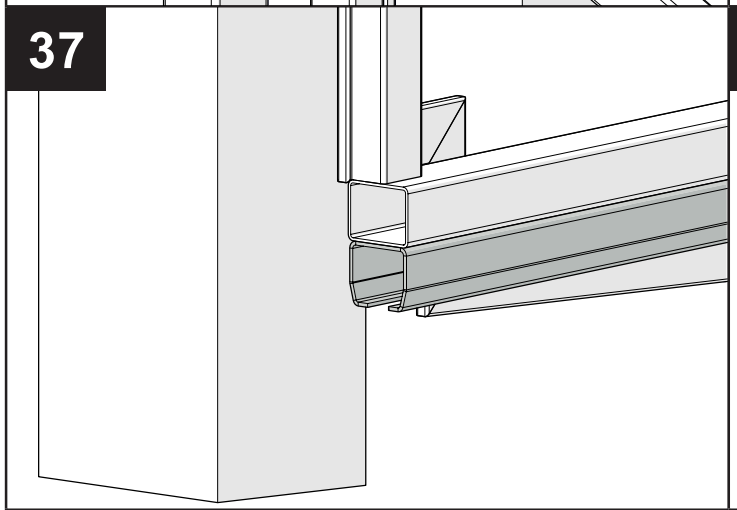

38

RUN M

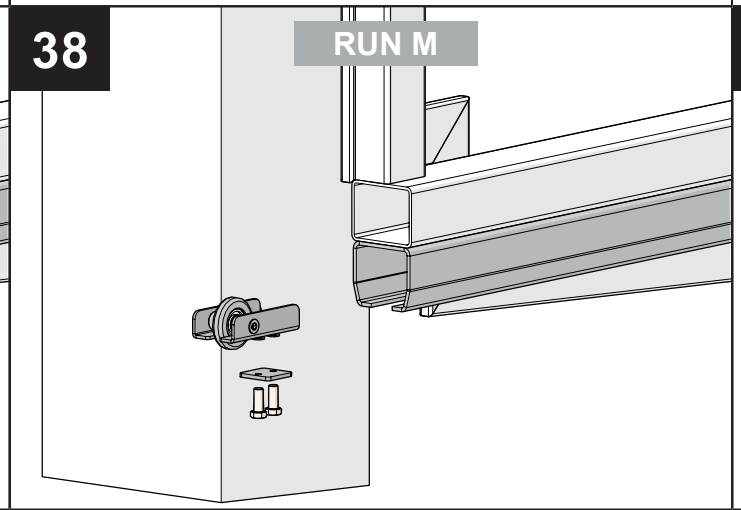

39

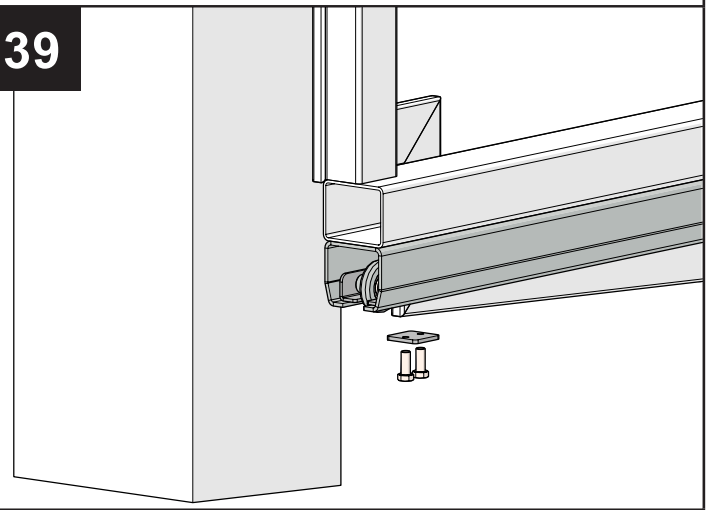

40

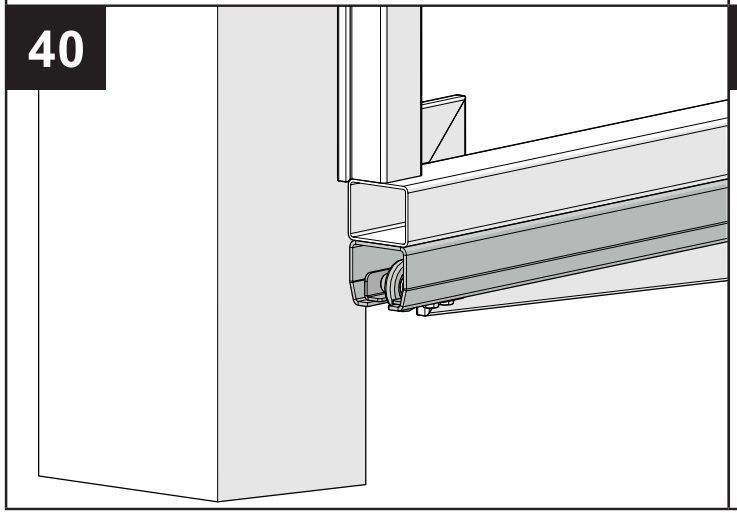

41

PILOT MN

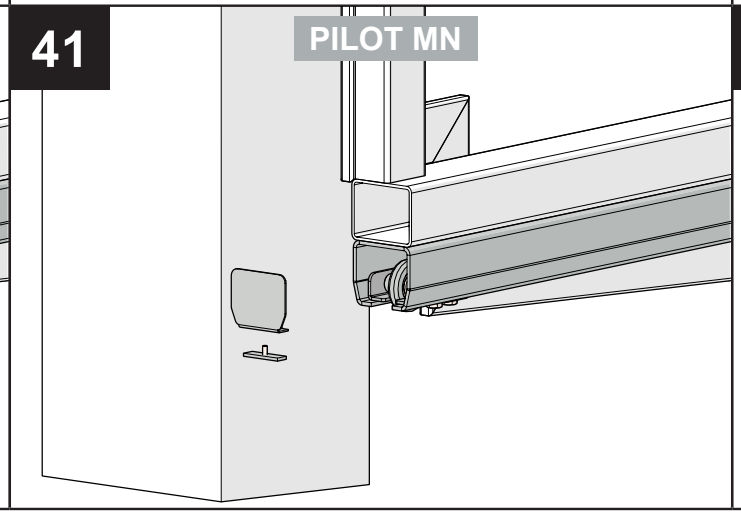

42

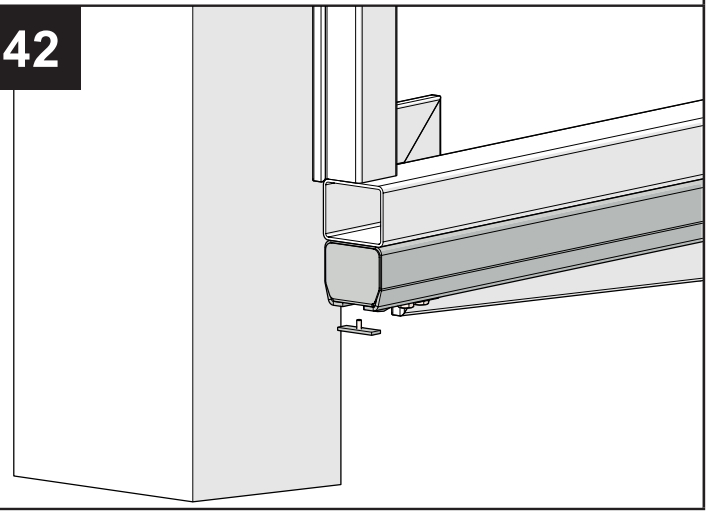

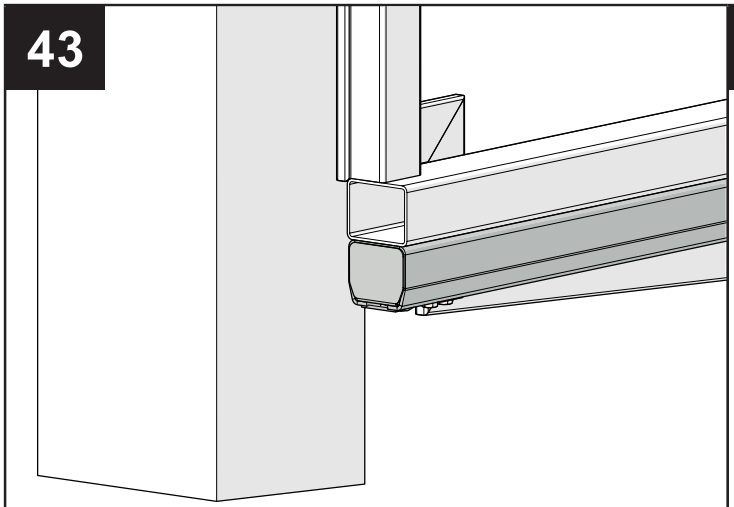
43

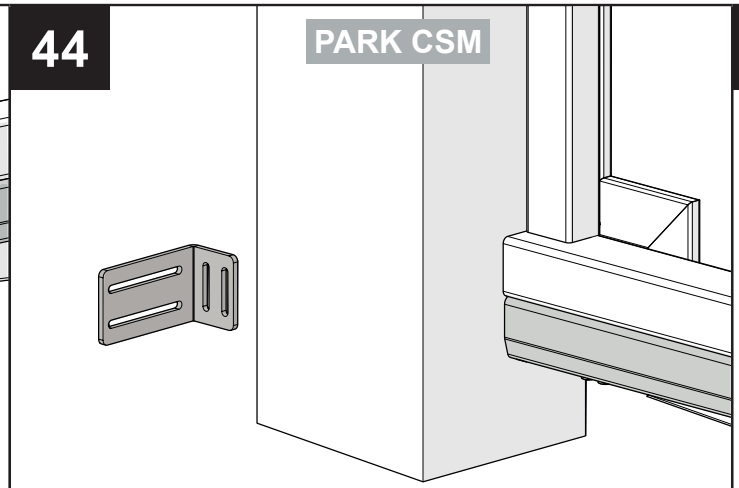
44
PARK CSM

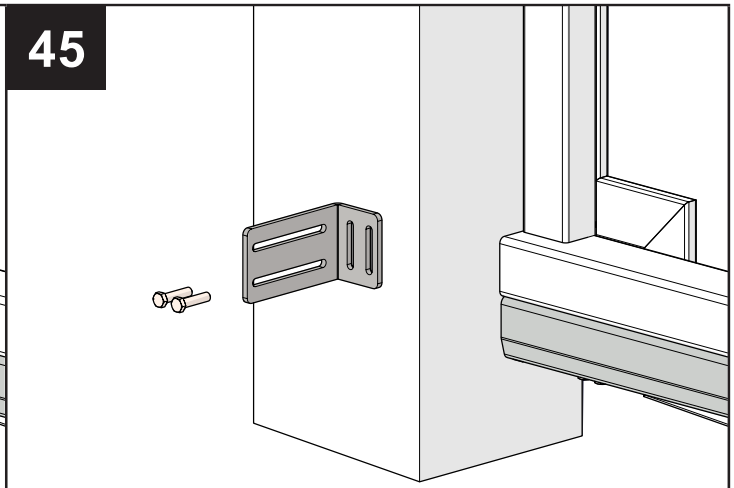
45

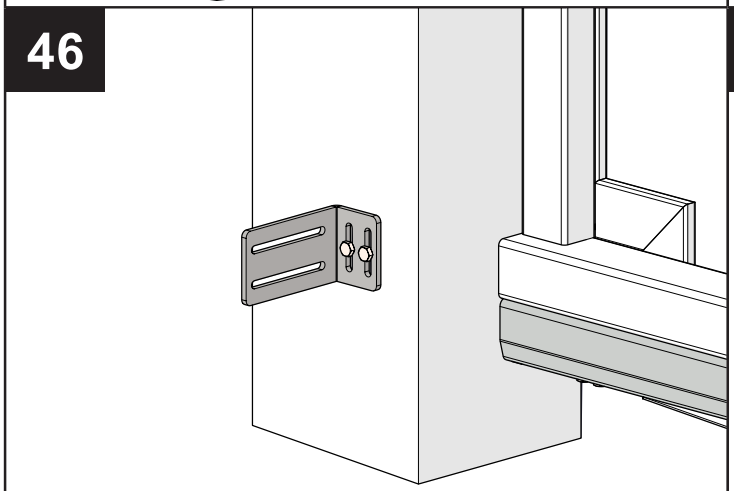
46

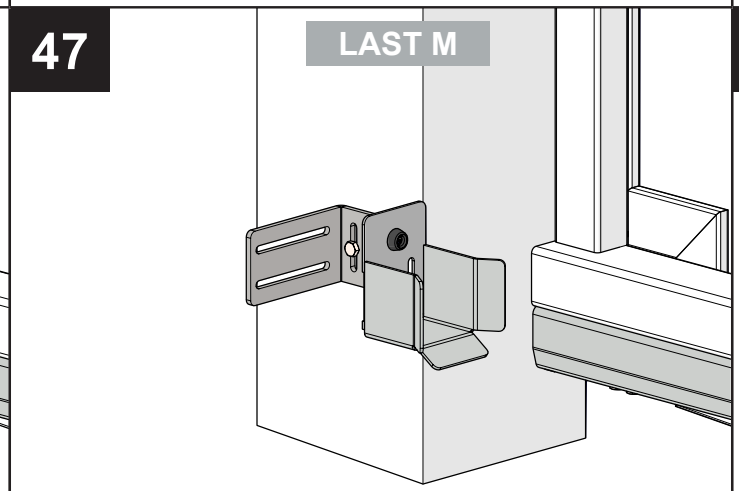
47
LAST M

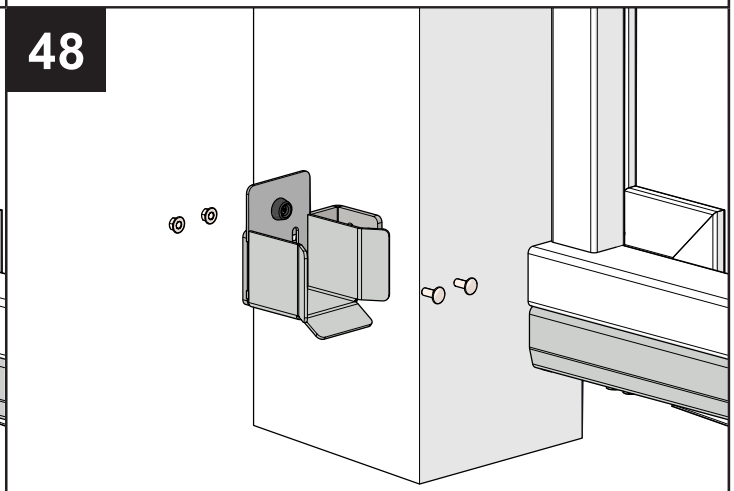
48

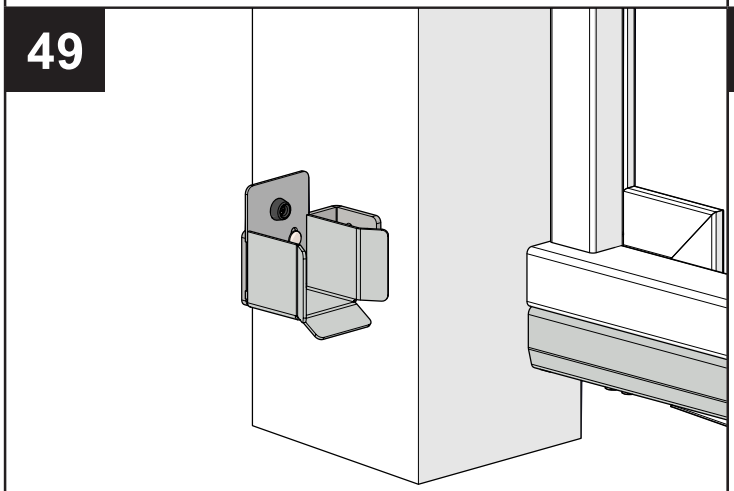
49

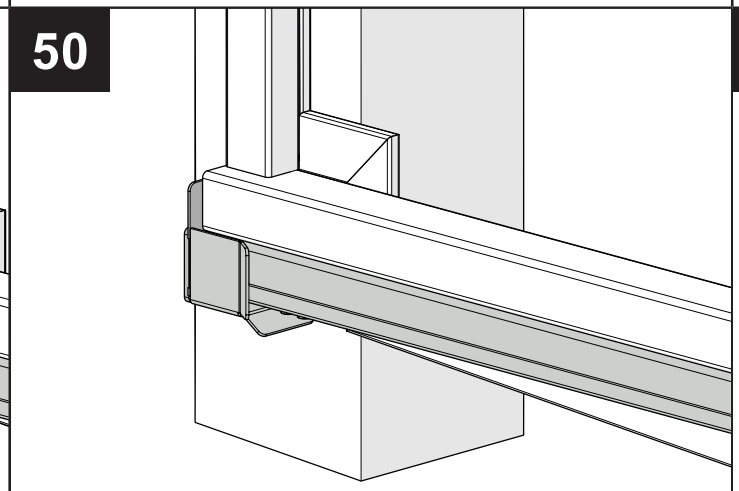
50

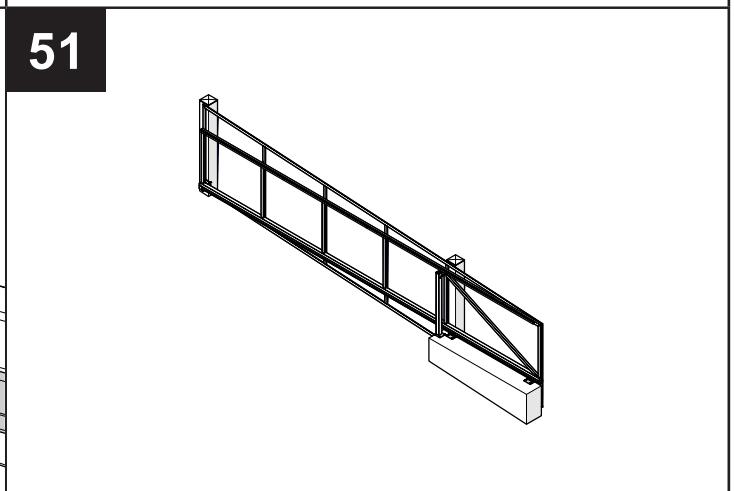
51

52

PILOT MN

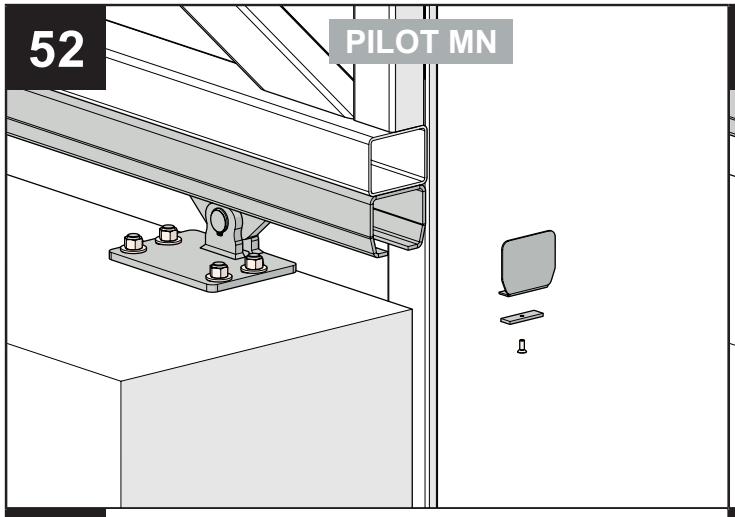

53

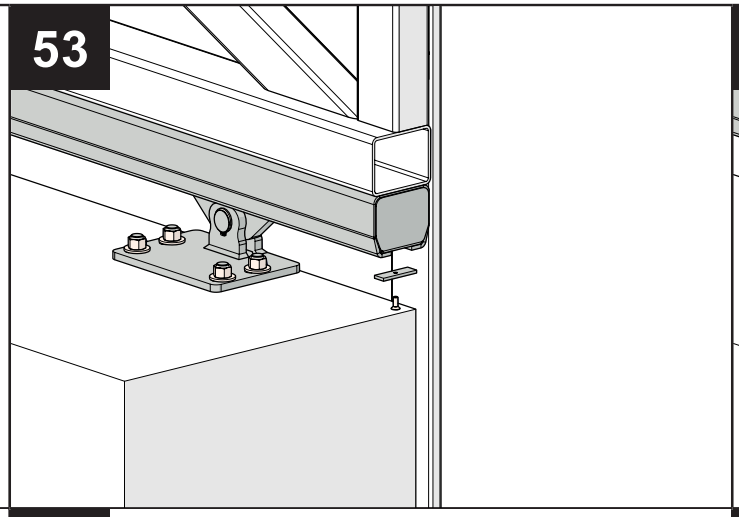

54

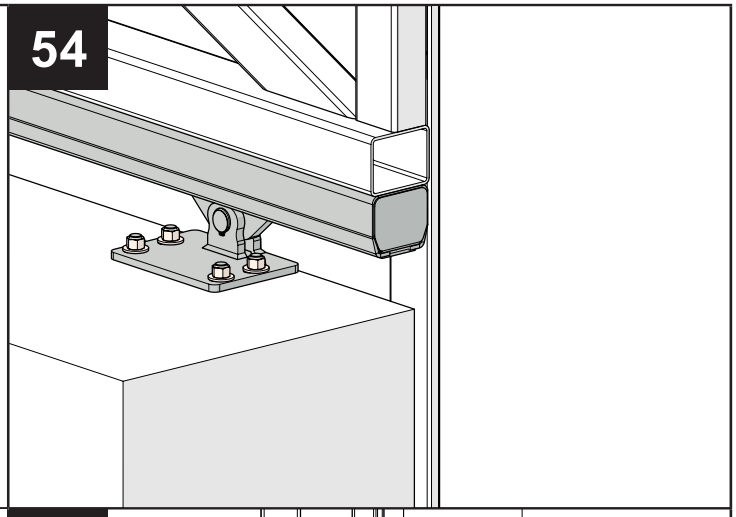

55

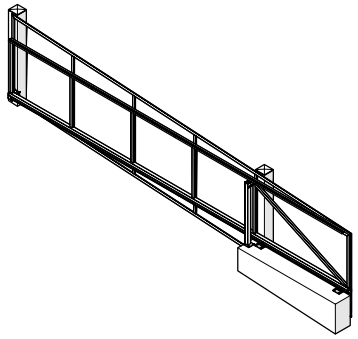

56

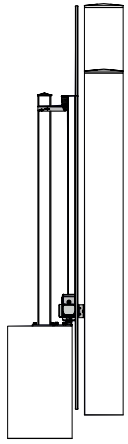

57

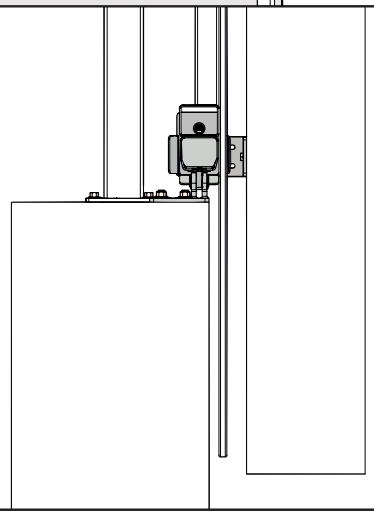

58

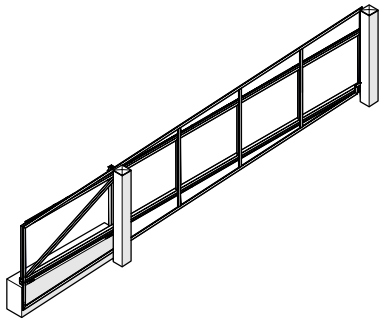

59

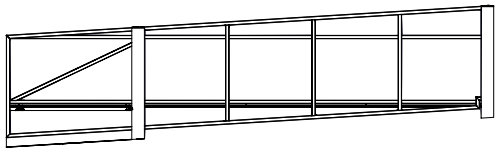



www.cais.eu