

CR15NM

Mini photocells IR PNP/NPN

CR15NM-PNP & CR15NM-NPN

sectional doors



swing gates



sliding gates




Different applications


CARACTERISTICS : RX + TX

- Polycarbonate
- 15 meters range*
- Resinated electronics, **IP67**
- 10 meters wire, black (RX) and white(TX)
- LED signal in front / behind
- Consumption 25 mA @ 12V
- Power supply 10 to 30V Vdc
- Electronic short circuit protection and wiring error

* Measured ranges will vary according to the equipment installation environment; the range may be reduced due to external interferences.

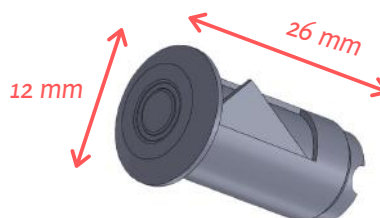

Application : CR15NM



Parameters modification via a Smartphone app to manage:

- Frequency
- Power
- Type of output : PNP / NPN (in case of emergency)
- LED On / Off